




6" FLANGED CROSSING

Available in 6' Wide Pedestrian Clearance or 12' & 20' Wide Vehicle Clearance

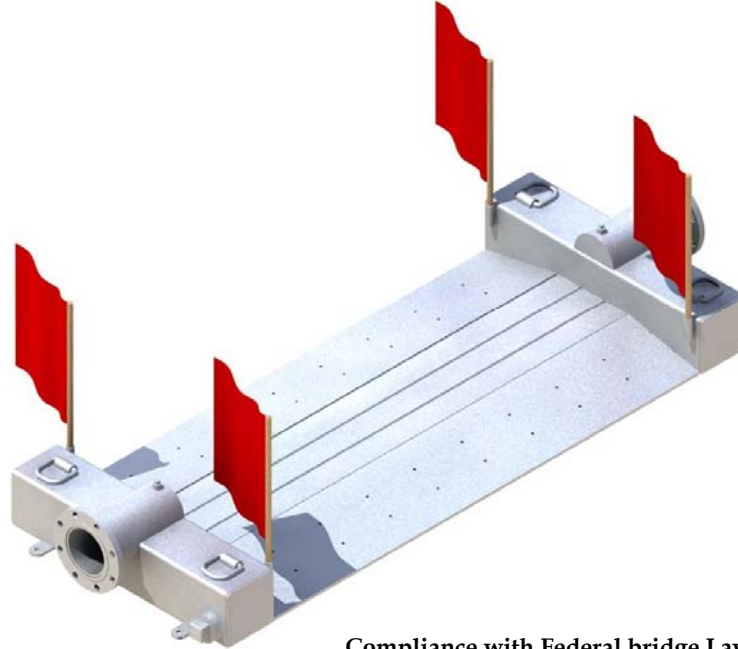

Compliance with Federal bridge Law (20,000 LBS. / Single Axle)
Requires Full Ground Contact in Tire Track Zone
Allowable Working Pressure - 75 P.S.I.

FEATURES

- ❑ 6" Pedestrian Crossing with **6-foot** wide passable clearance or
- ❑ 6" Road Crossing with **12-foot** or **20-foot** wide vehicle passable clearance.
- ❑ Two 1/2" Pressure Gauge Ports.
- ❑ Four weld-on D-Rings.
- ❑ Two 3" clean-out ports.
- ❑ Four 3/4" safety flag mounting points.
- ❑ White & Orange D.O.T. safety reflectors.
- ❑ Four nail/tie downs tabs with Ø3/4" hole.

ROAD CROSSING SPECIFICATIONS

- ❑ Overall footprint is 48-3/4" wide by 109-1/4", 181-1/4" or 277-1/4" long.
- ❑ Net Width for pedestrian is 72" (6') or
- ❑ Net width for vehicle is 144" (12') or 240" (20').
- ❑ Two 6" Inlet/Outlet 150# Flanges.
- ❑ Four Ø5/8" D-Rings.
- ❑ 12" wide angled drive entrance / exist ramps.
- ❑ Three 3" by 6" rectangle tubing, 1/4" wall.
- ❑ Galvanized in accordance with ASTM A-384 & A-385 standards.



Safety Flag

GRAINGER ITEM #4A415, 18" X 18" RED/ORANGE,
WITH Ø3/4" DOWEL OR EQUIVALENT.

RAIN FOR RENT

Postal Box 2248 • Bakersfield CA 93303
800 742-7246 • 661 399-9124 • FAX 661 393-1542
Internet: www.rainforrent.com